

50Q-Line Custom App Installation

Philips Signage

Prepare USB

1. Copy your “.apk” file to the root of a USB flashdrive

Note: Supported valid file formats are FAT, FAT32, EXT3, and EXT4

Insert the USB

- 49BDL3050Q
- 55BDL3050Q
- For above models insert the USB stick in the USB, see picture below.



- 65BDL3050Q
- 75BDL3050Q
- 86BDL3050Q
- For above models insert the USB stick in the USB, see picture below.



Enter Android Menu



- Press Home 1888

🏠 – 1 – 8 – 8 – 8


to enter the Android menu

- Select Apps


- Then select File Manager

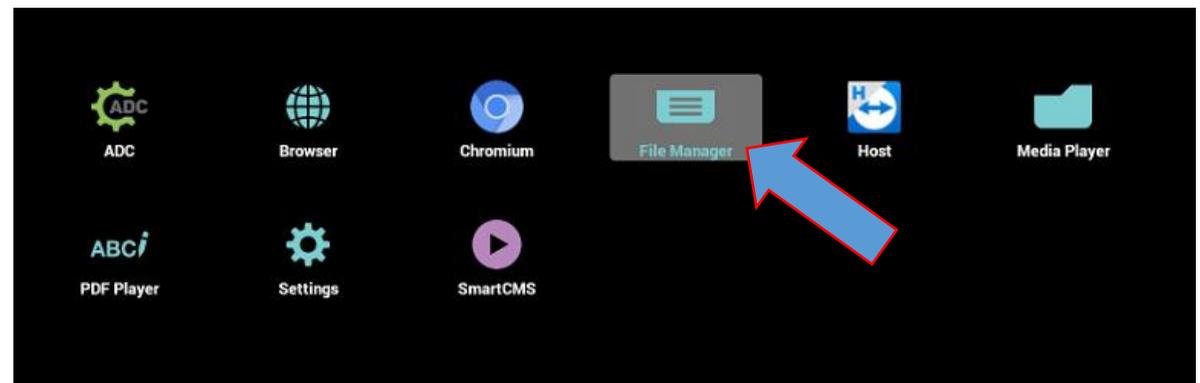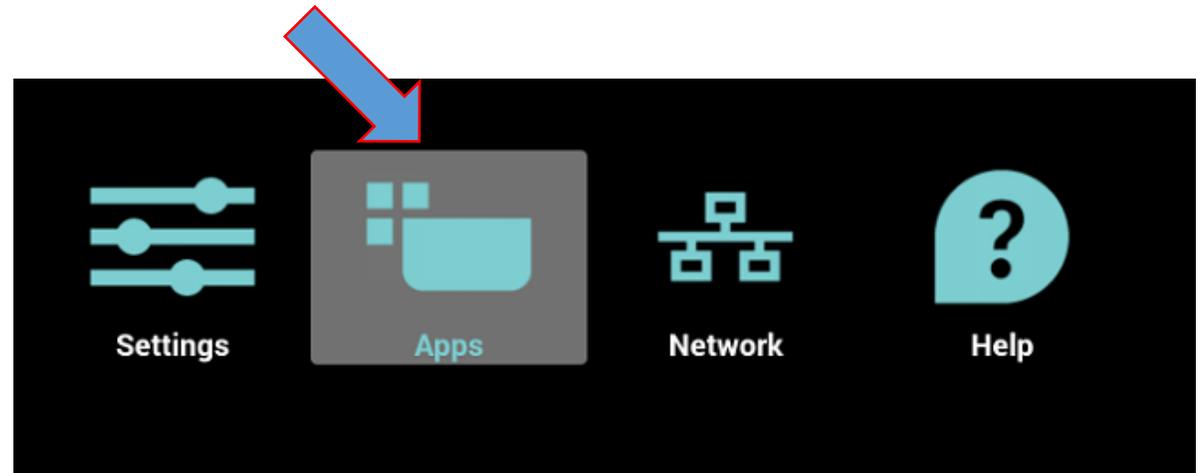


Select "mnt"

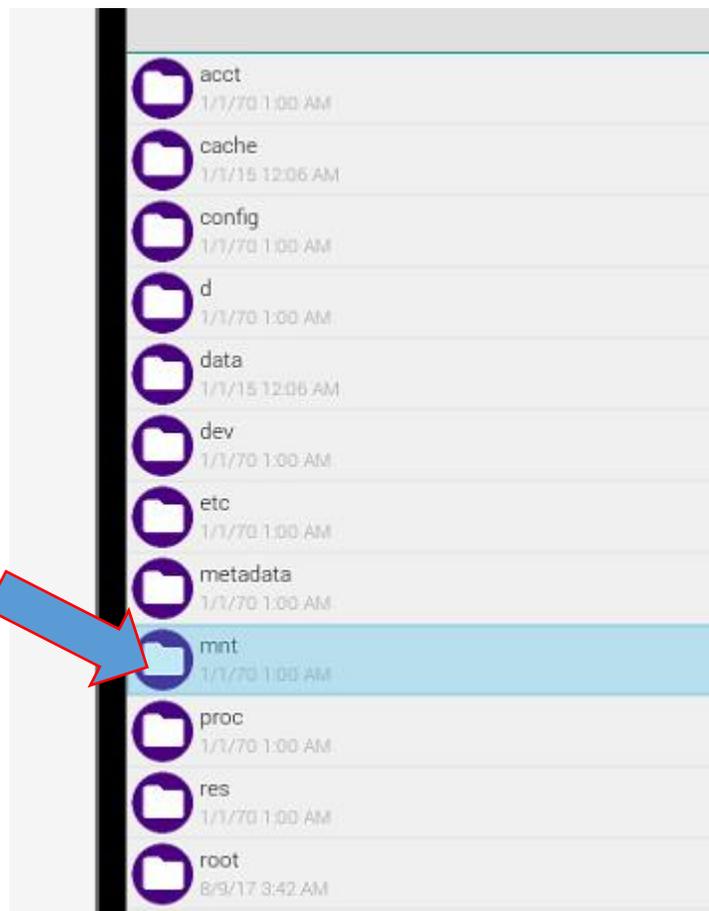


Then select Open

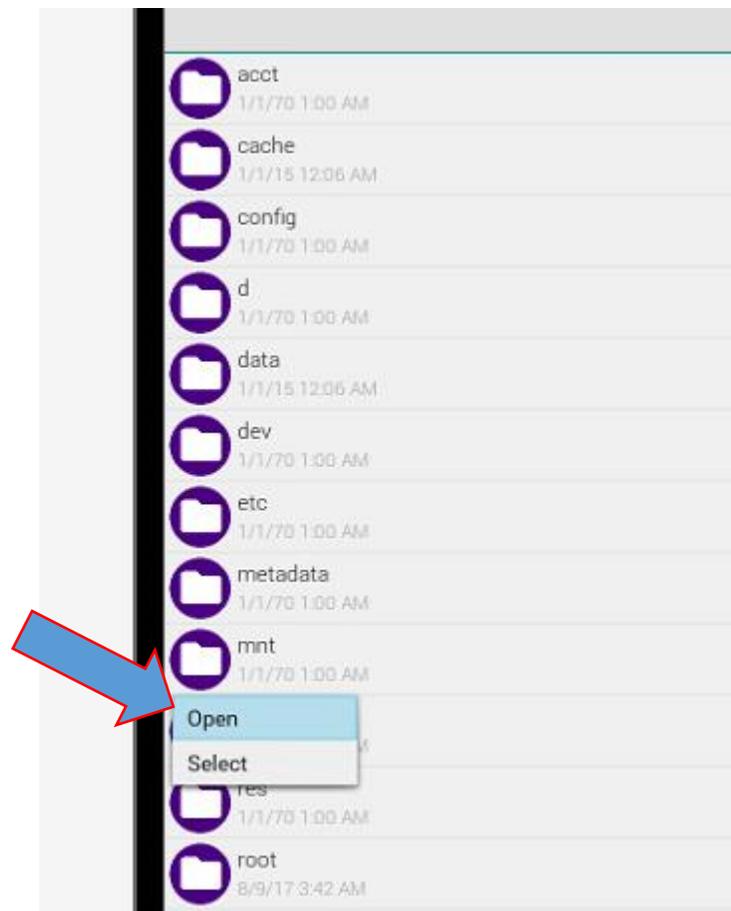


Select “usb_storage”

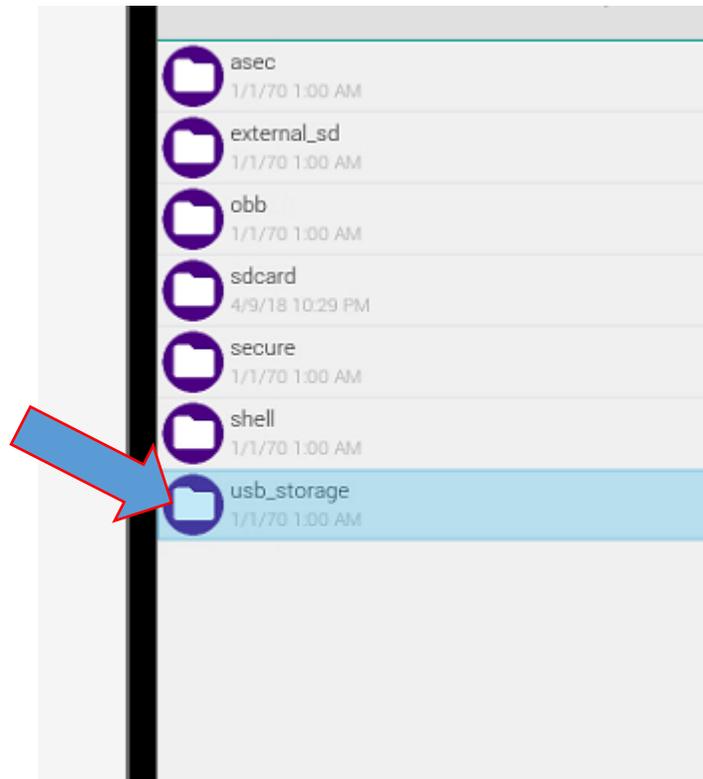


Then select Open

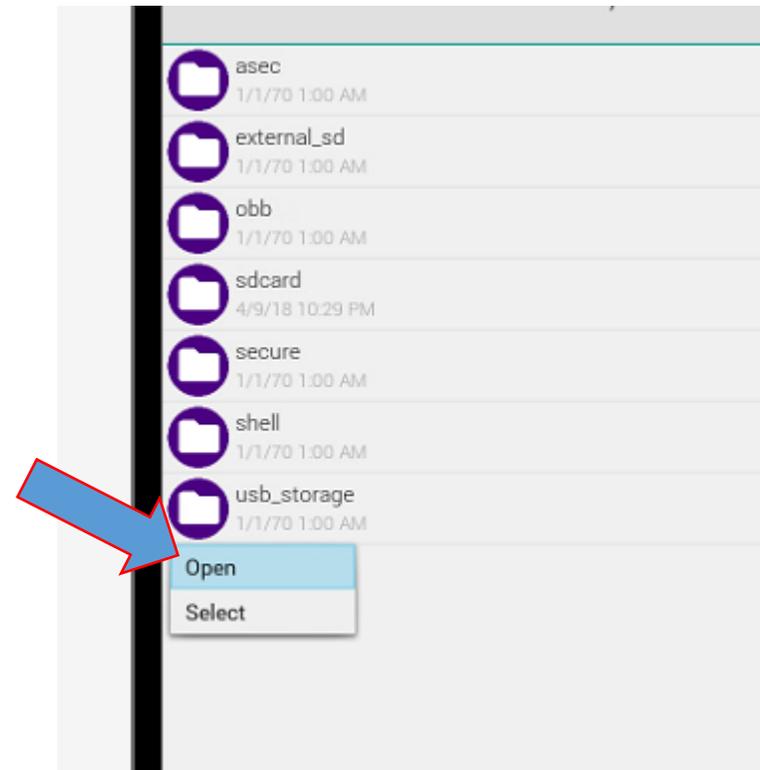


Select your .apk file

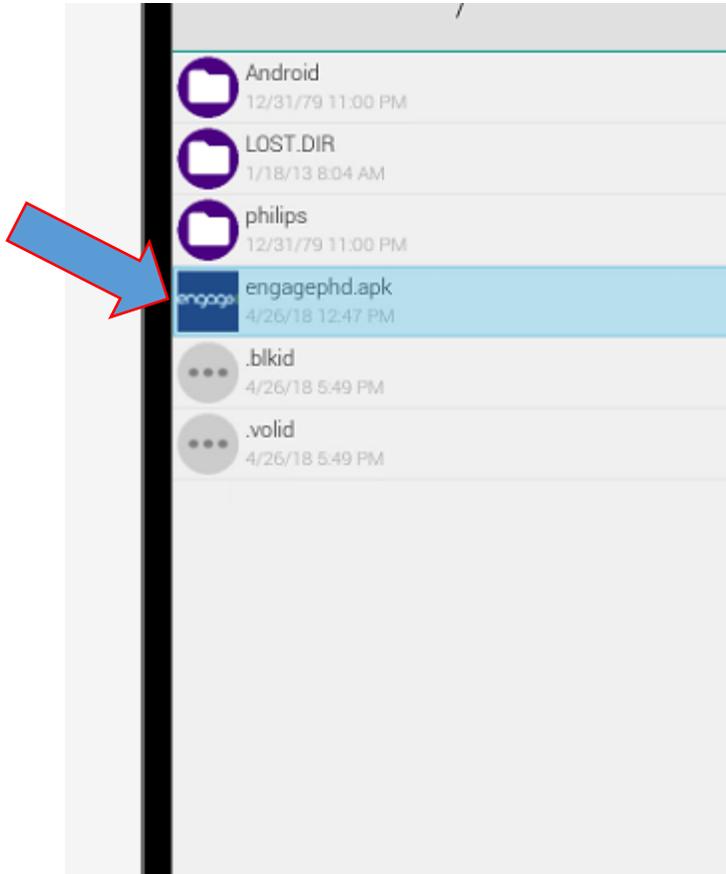


Then select Open

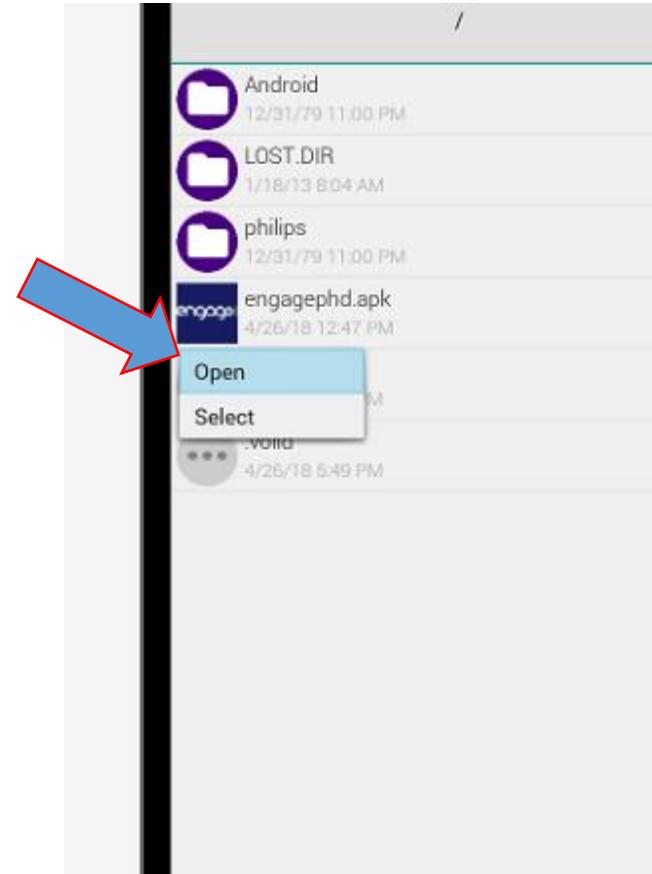


Scroll down to accept permissions

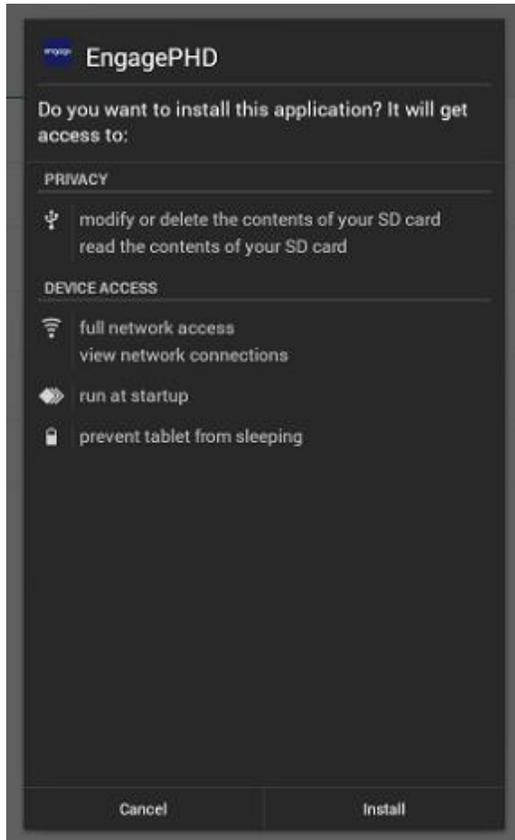

Then select Install

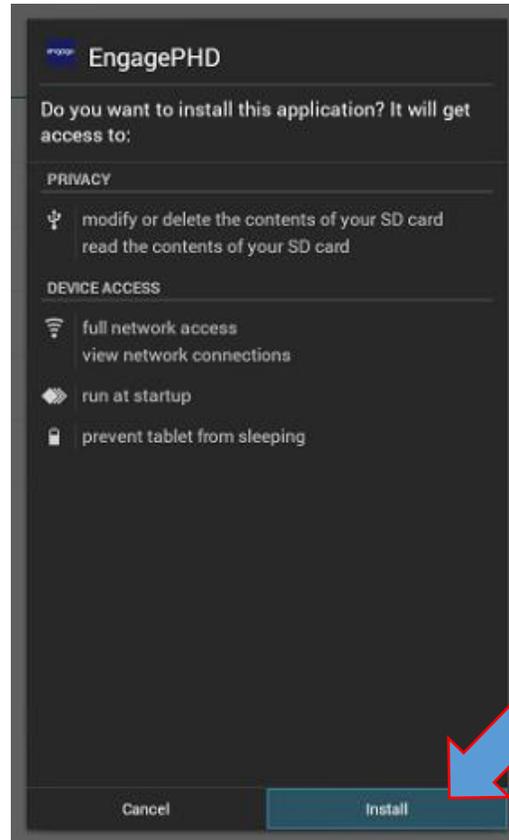

When done, Scroll down and select Done

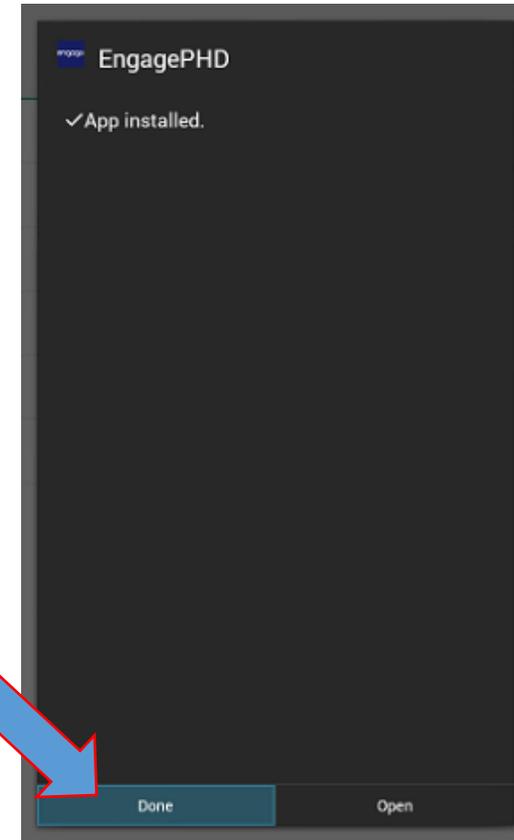



Now that your app is installed:

If you want this app to be your default content at turn-on, there are two additional steps you must perform:


1. Set this app as the “Custom input source”
2. Set the “Custom input source” as the “Boot-on source”

1. Set the Custom Input Source

- Enter Android Menu:
Press Home 1888 on the RC
🏠 – 1 – 8 – 8 – 8
to enter the Android menu
- Select Settings

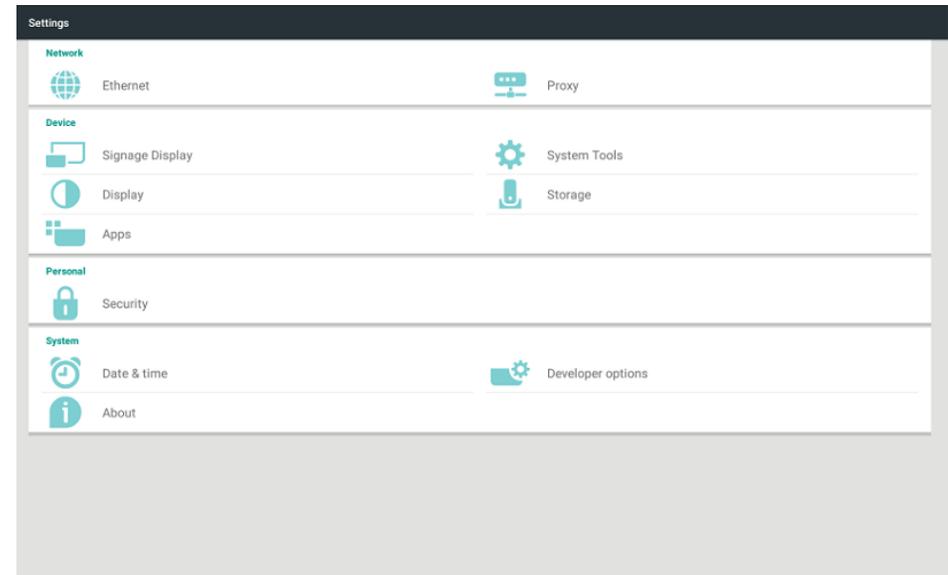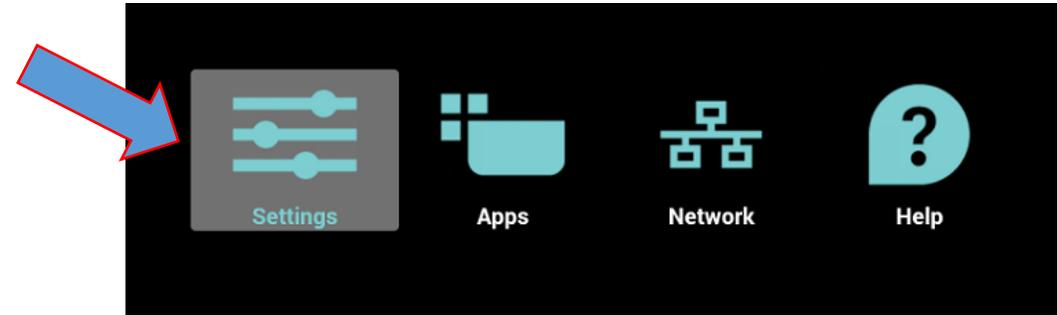

Select “Signage Display”

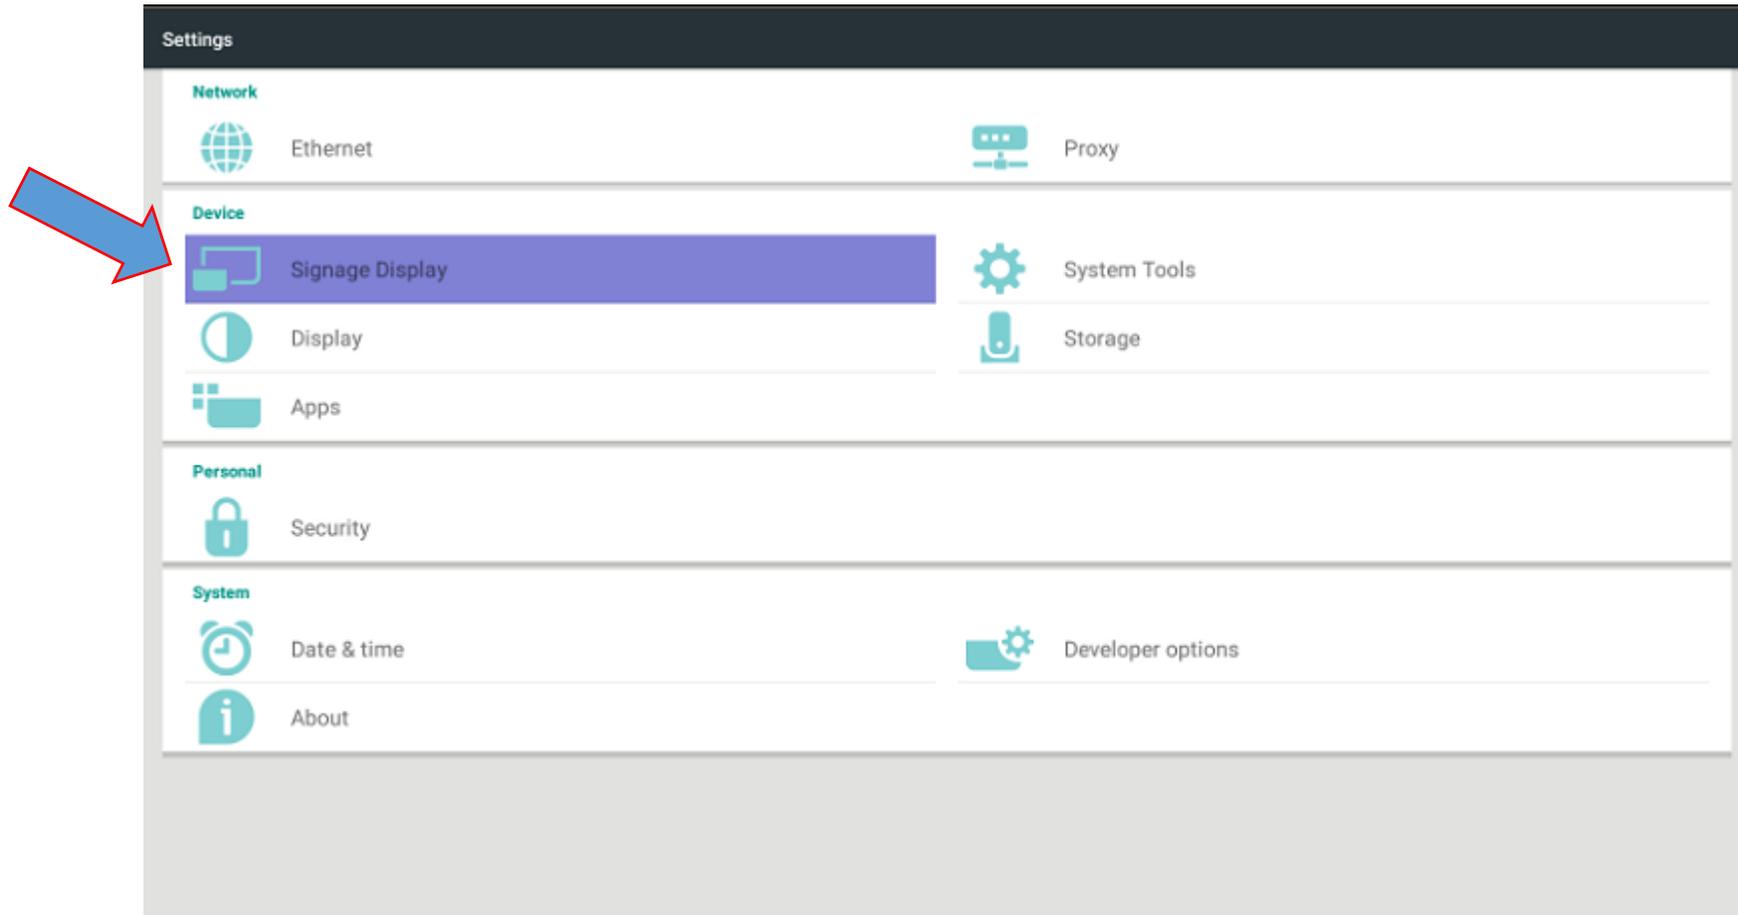


Select "Custom app"


The screenshot shows a settings menu for a 'Signage Display'. The menu is organized into sections: 'General settings', 'Server settings', 'Source settings', and 'Additional settings'. The 'Custom App' option is highlighted in blue, and a red arrow points to it from the right.

- ← Signage Display
- General settings
 - Signage Display Name
PD_00e04c360055
 - Boot Logo
 - Screenshot
- Server settings
 - Email Notification
 - FTP
 - Remote Control
 - SICP Network Port
- Source settings
 - Media Player
 - Browser
 - CMND & Play
 - PDF Player
 - Custom App**
- Additional settings
 - Tiling Tool
Deactivated

Select "Select app"

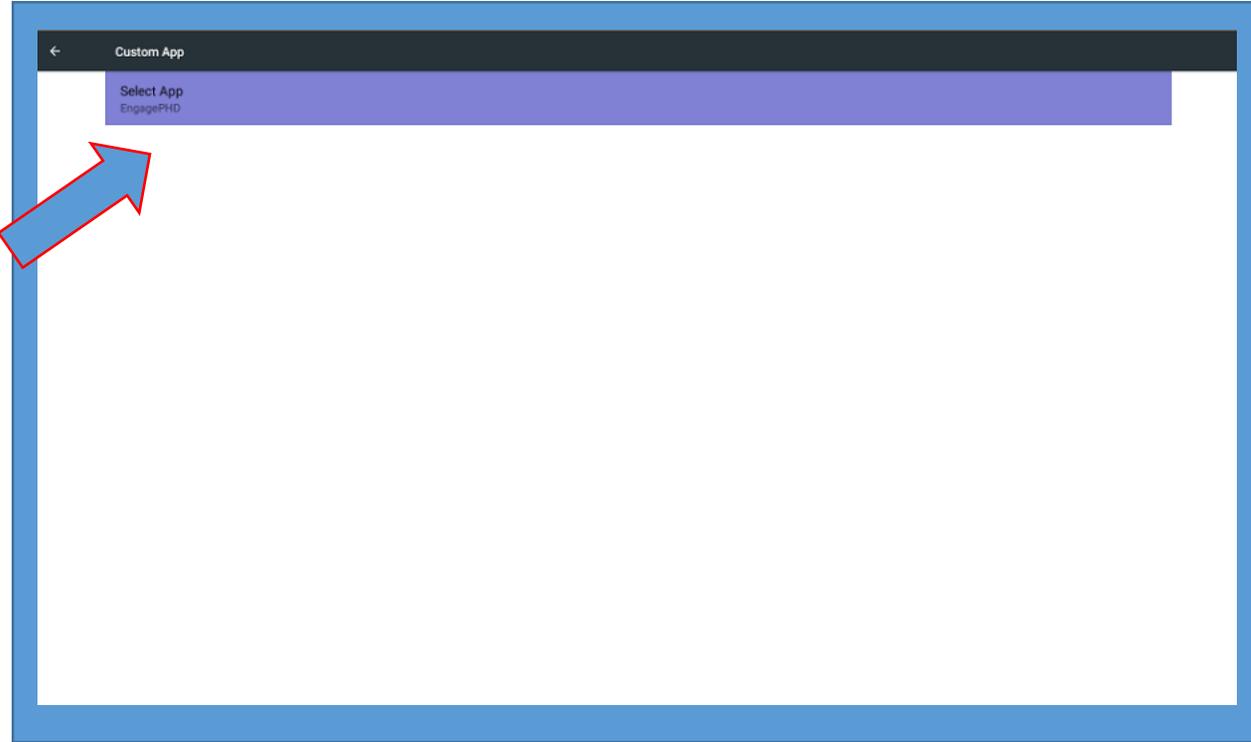

This will pop up a list of installed apps

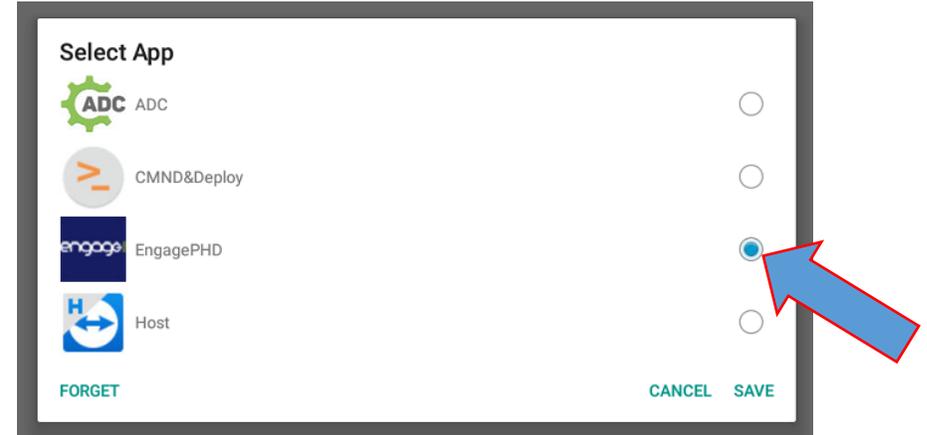

Select the app you want to assign to the "Custom" input source




Then Select "Save"

Exit the Android menu

- Press the Back button (↶) several times until the Android menu is exited completely


2. Set the “Boot on source”

- Enter the Scaler menu
- Press the Home () button on the remote control

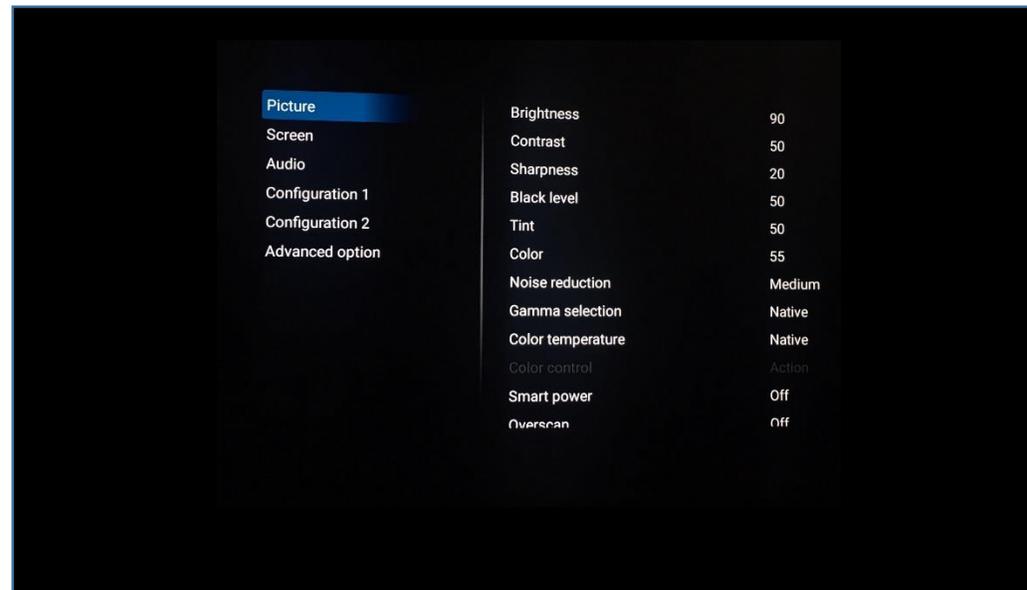


Select Configuration 1 / Boot on source

- Scroll down to “Configuration 1”

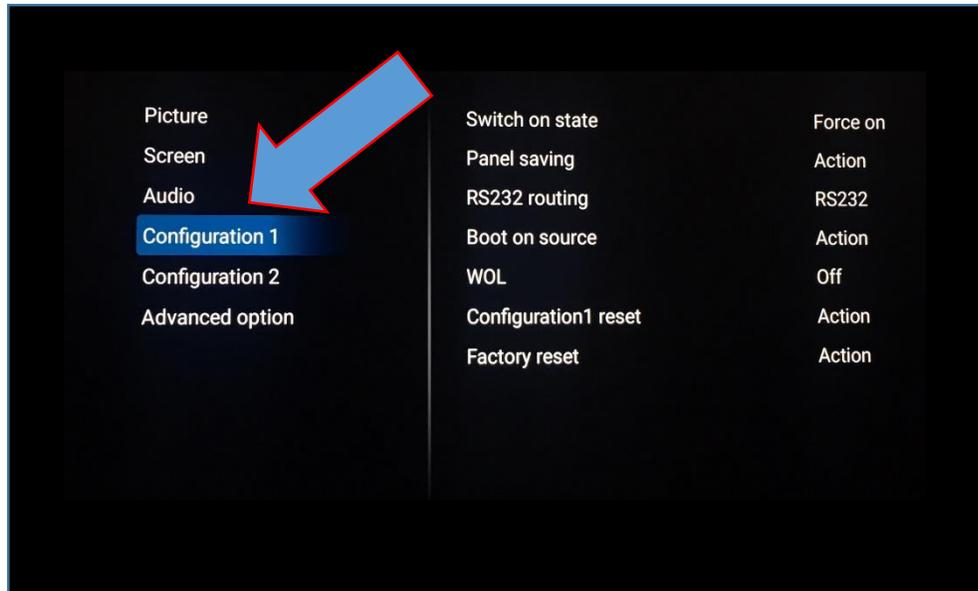


- Scroll right and down to “Boot on source” and select it

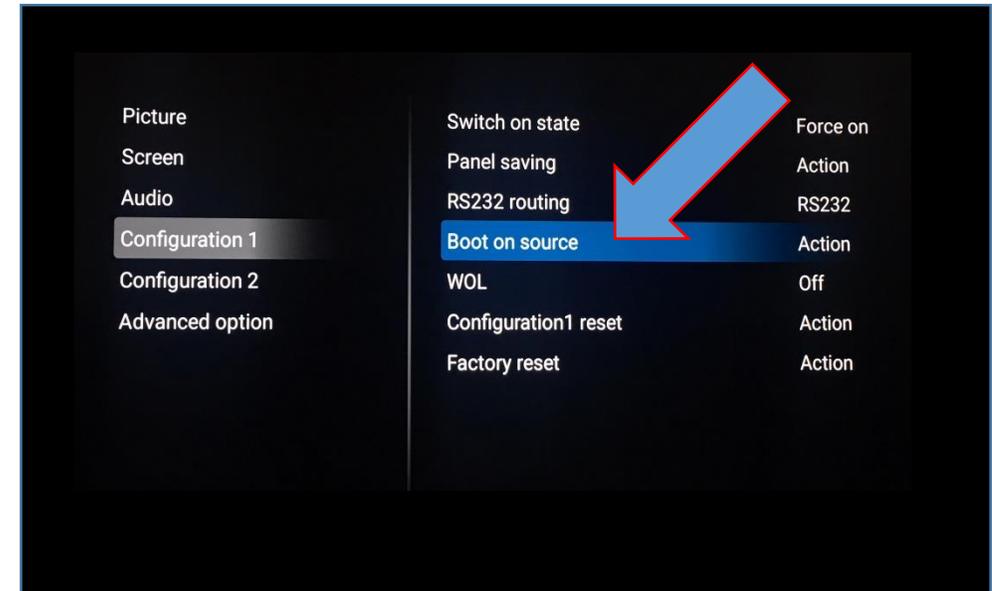


Set Configuration 1 / Boot on source to Custom and SAVE it


- Ensure that Last Input is “NOT ticked”

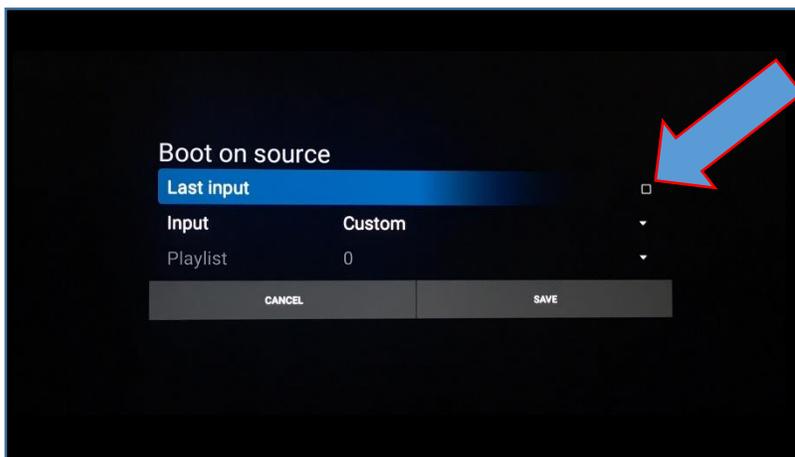

- Select Input – then select Custom from the list

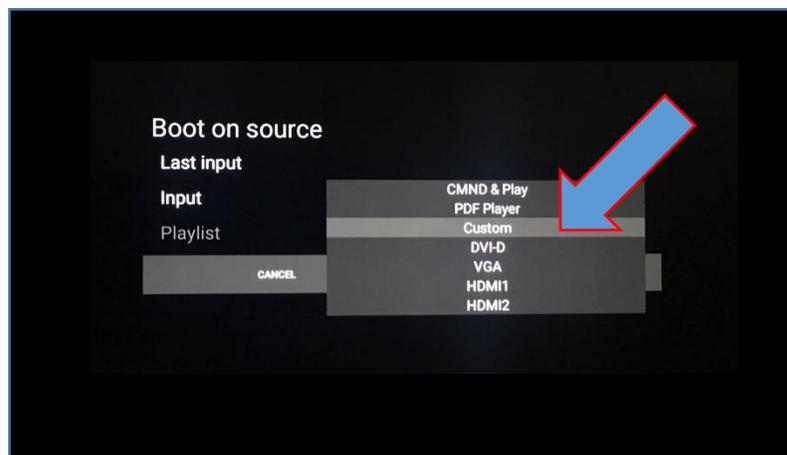

- SAVE the setting

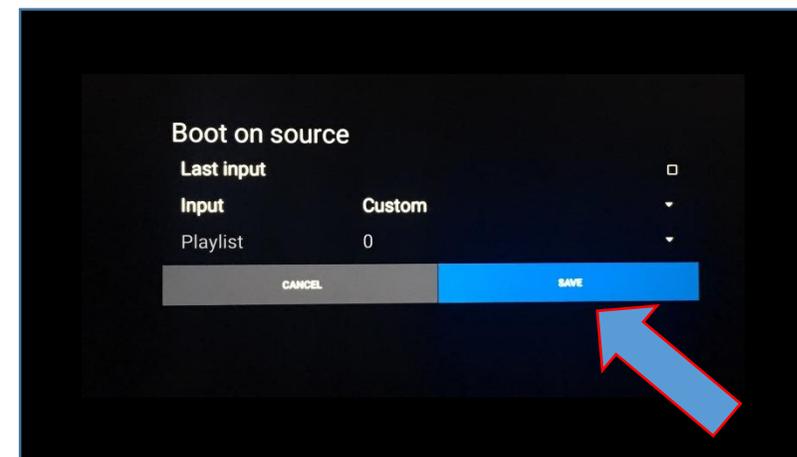

Done!